


ブラインドリベット

BLIND RIVET


オープンタイプ〔丸頭〕

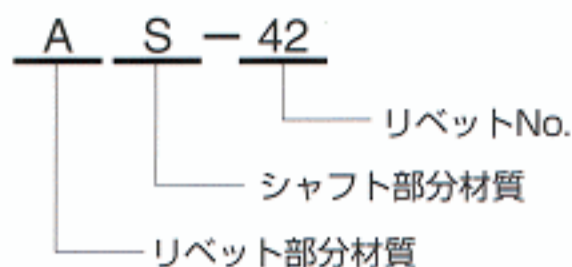

NSA		アルミニウム スチール		NS		オール スチール		NSS		ステンレス スチール		各部寸法 (単位mm)					
TAPD	BS			SD	BS			SSD	BS							STS	
AS				SB								締付可能厚 G	リベット 外径 D	下穴径 h	フランジ 頭径 H		
リベット No.	標準強度 ^N (kgf)	引張	剪断	L	リベット No.	標準強度 ^N (kgf)	引張	剪断	L	リベット No.	標準強度 ^N (kgf)					引張	剪断
32	730	490	6.1	32	790	680	6.1	32	1,370	1,220	5.5	0.5~3.2	2.4	2.5	4.8		
33	(75)	(50)	7.7	34	(81)	(70)	9.0	34	(140)	(125)	8.7	3.2~4.8					
34			9.0									4.8~6.4					
41	1,420 (145)	930 (95)	5.1	41	1,760 (180)	1,140 (218)	5.1	41	2,790 (284)	2,140 (218)	5.1	0.5~1.6	3.2	3.3	6.4		
42			6.8	42			6.8	42			6.8	1.6~3.2					
43			8.3	43			8.3	43			8.3	3.2~4.8					
44			9.9	44			9.9	44			9.9	4.8~6.4					
45			11.5	45			11.5	45			11.5	6.4~8.0					
46			13.4	46			13.4	46			13.4	8.0~9.5					
48			16.8	48			16.8	48			16.8	9.5~12.8					
410			20.2									12.8~15.8					
412			23.3									15.8~19.0					
414			27.1									19.0~22.2					
51	2,250 (230)	1,470 (150)	4.6	52	2,500 (255)	2,020 (206)	7.4	52	4,400 (449)	3,400 (347)	7.4	0.5~1.6	4.0	4.1	8.0		
52			7.4				52				7.4	52				7.4	1.6~3.2
53			9.0				53				9.0	53				9.0	3.2~4.8
54			10.5				54				10.5	54				10.5	4.8~6.4
55			12.0				55				12.0	55				12.0	6.4~8.0
56			13.7				56				13.7	56				13.7	8.0~9.5
58			17.4				58				17.4	58				17.4	9.5~12.8
510			19.8														12.8~15.8
512			24.0														15.8~19.0
514			27.2														19.0~22.2
62	3,230 (330)	2,150 (220)	8.0	62	3,630 (370)	2,840 (290)	8.0	62	6,200 (632)	4,700 (480)	8.0	1.6~3.2	4.8	4.9	9.6		
63			9.6				63				9.6	63				9.6	3.2~4.8
64			11.2				64				11.2	64				11.2	4.8~6.4
65			12.8				65				12.8	65				12.8	6.4~8.0
66			14.4				66				14.4	66				14.4	8.0~9.5
68			17.5				68				17.5	68				17.5	9.5~12.8
610			21.4				610				21.4	610				21.4	12.8~15.9
612			24.6				612				23.3	612				23.3	15.9~19.1
614			27.9				614				26.5	614				26.5	19.1~22.3
616			31.2				616				29.7	616				29.7	22.3~25.4
618	33.0					25.4~28.6											
620	35.0					28.6~31.8											
622	40.0					31.8~34.9											
82	4,900 (500)	3,230 (330)	9.2	84	6,500 (663)	4,600 (470)	12.6	84	10,780 (1,100)	9,800 (1,000)	12.4	1.6~3.2	6.4	6.5	12.8		
84			12.6				84				12.6	84				12.4	3.2~6.4
86			15.8				86				15.8	86				15.6	6.4~9.5
88			19.0				88				19.0	88				18.9	9.5~12.8
810			22.1				810				22.1	810				22.1	12.8~15.9
812			25.3				812				25.4	812				25.4	15.9~19.1
814			28.9				814				28.6	814				28.6	19.1~22.3
816			30.8														22.3~25.4

※強度表示について1kgf≒9.807N(ニュートン)で換算されています。

オープンタイプ〔丸頭〕

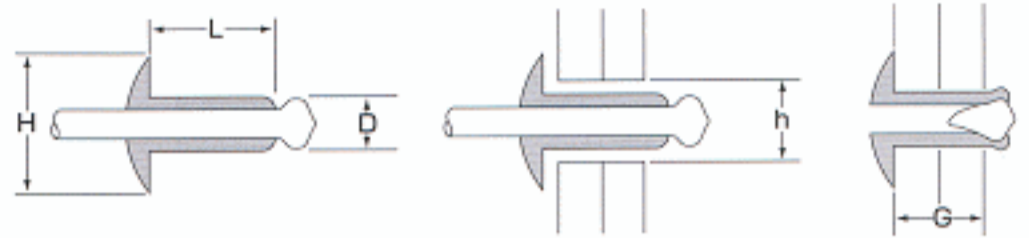

NST		オール ステンレス		NA		オール アルミニウム		NTA		アルミニウム ステンレス		各部寸法 (単位 ^m /m)			
SSD	SSBS			AD	ABS			TAPD	SSBS						
ステンレスリベット ステンレスシャフト		リベット 長さ L		アルミニウムリベット アルミニウムシャフト		リベット 長さ L		アルミニウムリベット ステンレスシャフト		リベット 長さ L		締付可能厚 G	リベット 外径 D	下穴径 h	フランジ 頭径 H
リベット No.	標準強度 ^N (kgf)			リベット No.	標準強度 ^N (kgf)			リベット No.	標準強度 ^N (kgf)						
	引張	剪断			引張	剪断			引張	剪断					
32	1,370	1,220	5.5	32	590	345	5.6	32	730	490	5.6	0.5~ 3.2	2.4	2.5	4.8
—	(140)	(125)	—	33	(60)	(35)	7.6	33	(75)	(50)	7.6	3.2~ 4.8			
34			8.7	34			9.1	34			9.1	4.8~ 6.4			
41	2,790 (284)	2,140 (218)	5.1	41	1,030 (105)	690 (70)	4.8	41	1,420 (145)	930 (95)	4.8	0.5~ 1.6	3.2	3.3	6.4
42			6.8	42			6.5	42			6.5	1.6~ 3.2			
43			8.3	43			8.2	43			8.2	3.2~ 4.8			
44			9.9	44			9.9	44			9.9	4.8~ 6.4			
45			11.5	45			11.6	45			11.6	6.4~ 8.0			
46			13.4	46			13.3	46			13.3	8.0~ 9.5			
48			15.5	48			16.7	48			16.7	9.5~ 12.8			
				410			19.0	410			19.0	12.8~ 15.8			
		412	23.0	412	23.0	15.8~ 19.0									
52	4,400 (449)	3,400 (347)	7.4	52	1,500 (153)	1,050 (107)	7.2	52	2,250 (230)	1,470 (150)	7.2	1.6~ 3.2	4.0	4.1	8.0
53			9.0	53			8.9	53			8.9	3.2~ 4.8			
54			10.5	54			10.5	54			10.5	4.8~ 6.4			
55			12.0	55			12.2	55			12.2	6.4~ 8.0			
56			13.7	56			13.9	56			13.9	8.0~ 9.5			
58			16.1	58			17.2	58			17.2	9.5~ 12.8			
				510			19.7	510			19.7	12.8~ 15.8			
				512			23.0	512			23.0	15.8~ 19.0			
62	6,200 (632)	4,700 (480)	8.0	62	2,160 (220)	1,500 (153)	7.6	62	3,100 (316)	2,150 (219)	7.6	1.6~ 3.2	4.8	4.9	9.6
63			9.6	63			9.3	63			9.3	3.2~ 4.8			
64			11.2	64			11.0	64			11.0	4.8~ 6.4			
65			12.8	65			12.8	65			12.8	6.4~ 8.0			
66			14.4	66			14.5	66			14.5	8.0~ 9.5			
68			17.5	68			17.9	68			17.9	9.5~ 12.8			
610			19.9	610			20.1	610			20.1	12.8~ 15.9			
612			23.3	612			23.3	612			23.3	15.9~ 19.1			
614			26.5	614			26.5	614			26.5	19.1~ 22.3			
616			29.7	616			29.7	616			29.7	22.3~ 25.4			
84	10,780 (1,100)	9,800 (1,000)	12.4	82	3,330 (340)	2,450 (250)	9.2	82	5,390 (550)	3,350 (342)	9.2	1.6~ 3.2	6.4	6.5	12.8
86			15.6	84			12.4	84			12.4	3.2~ 6.4			
88			18.9	86			15.6	86			15.6	6.4~ 9.5			
810			22.1	88			18.9	88			18.9	9.5~ 12.8			
812			25.4	810			22.1	810			22.1	12.8~ 15.9			
814			28.6	812			25.4	812			25.4	15.9~ 19.1			
				814			28.6	814			28.6	19.1~ 22.3			

※ASカラーリベット標準色(白・黒・茶・クリーム・アイボリー)は各サイズ即納品が用意されています。